

week



Retaining Clip in delivery included

SC 44.X1 pro

- 1 or 2 channels
- Daily and weekly program
- 46 memory locations
- Minimum interval 1 min
- Switching capacity 16 A per channel
- Permanent by date / holiday function
- Manual permanent mode
- Manual override
- Automatic sorting of switching times on readout
- Unrestricted block programming
- Fully automatic daylight saving time
- Elapsed time and pulse counter
- Pulse function
- Security by PIN-Code
- Illuminated display
- Data-key function

Further information / Accessory

Accessory: Data-key DK pro and programming package PP 50 pro
(not included in delivery of the time switch)





Highlights


- Text based menu and self-explanatory symbols
- Display with a large dot matrix area to provide two high resolution text lines
- Easy handling. Quick and intuitive programmable time switch
- Can be programmed with supply disconnected (6 years battery-reserve)
- Unlimited program security by E²-PROM
- Programmable with PC (Accessory Data-key DK pro and Programming package PP 50 pro)

Digital time switch SC 44.X1 pro


for switchboard panel and wall mounting

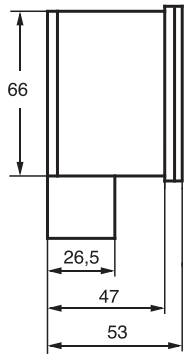

SC 44.11 pro (1 channel)



SC 44.21 pro (2 channels)



Technical data	
Supply voltage	230 V, 50–60 Hz other voltages on request
Power consumption (real power)	0.5–1.2 W (depending on the switching status)
Channels (potential-free)	Channel A: change-over · channel B: normally open contact gap < 3 mm (μ)
Contact material	AgNi
Switching capacity per channel	16 A / 250 V~ at cosφ=1 6 A with inductive load cosφ=0.6
Min. switching power	300 mW (5 V / 5 mA)
Max. starting current	30 A
Switching functions	ON, OFF, pulse
Pulse length Pulse function (switching time)	00:01 up to 59:59 mm:ss
Memory locations	30
Minimum interval	1 min
Time base	Quartz crystal
Power back-up (at 20°C)	approx. 10 years (depends on the Lithium-battery life)
Program security	unlimited by E ² -PROM
Quartz crystal accuracy (at 20°C)	≤ ±0.5 sec/day (in normal use)
Display	high resolution LCD (visible area 7.5 cm ²)
Permitted ambient temperature	-30°...+55°C
Enclosure	self-extinguishing thermoplastic
Dimensions	72 x 72 mm (to DIN EN 43700)
Switchboard flush mounting	Retaining clip in 68 x 68 mm cutout
Surface mounting	Wall mounting with terminal cover
Type of connection	Screw terminals
Type of protection	IP 20 to DIN EN 60529
Class of protection	II when installed according to regulations
Accessories (not included in delivery)	Data-key DK pro, programming package PP 50 pro
Certification mark	VDE

Overview time switch functions

	Switching time	Channel-key
ON/OFF	✓	✓
Permanent	✓	✓
Pulse	✓	
Timer		
Cycle		
Astro		
Permanent by date	✓	
Yearly program		

Order number	Channels	Time base	Special function
SC 44.11 pro	1	Quartz	data-key (optional)
SC 44.21 pro	2	Quartz	data-key (optional)

✓ Housing colour