





- Power supply of slave clocks
- Short-circuit proof
- Output current 1.5 A
- For approx. 180 slave clocks (at 24 VDC)
- With and without power back-up

Power supply unit NT 73 pro

pluggable into 19"-housing (DIN EN 41494)

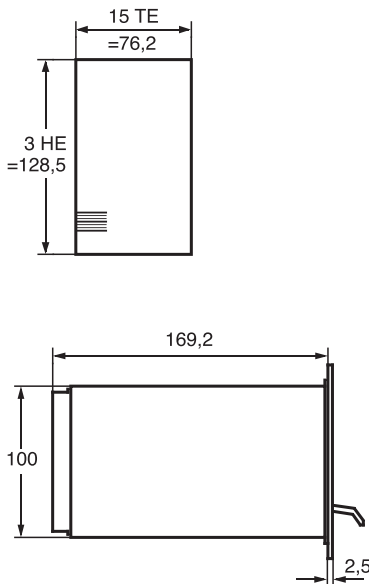

Technical data	
Voltages	230 V, 50 Hz
Power consumption	max. 80 W
Output voltage	NT 73.X4 pro: 24 VDC NT 73.X2 pro: 12 VDC
Output current	500 mA (approx. 60 slave clocks)
Internal resistance	≤ 3 Ohm (NT without battery buffering)
Residual ripple	< 0.5% (NT without battery buffering)
Power back-up (at 20°C)	NT 73.6X: ≥ 24 h for max. load
Permitted ambient temperature	-5°...+50°C
Mounting	pluggable into 19"-housing
Colour front panel	black, Al anodised
Dimensions front panel	128.5 x 76.2 mm
Type of connection	32-pole male multipoint connector (DIN EN 41612)
Type of protection	IP 00 to DIN EN 60529
Class of protection	I when installed according to regulations

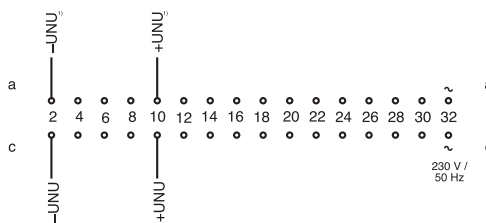

¹⁾ UNU see label

Order number	Output voltage	power back-up
NT 73.24 pro	24 VDC	-
NT 73.64 pro	24 VDC	with

✓ Housing colour