




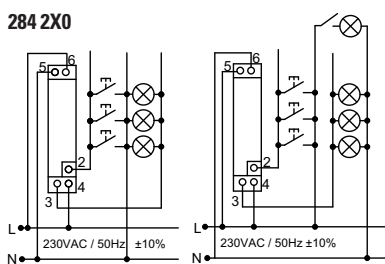

- Electronic lighting timer
- Manual override for timed or permanent lighting
- 3- or 4-conductor rising mains
- Resettable
- Glow lamp load: up to 100 mA!
- Time delay 30 seconds to 10 minutes
- 284 250: Advance warning function included

Staircase lighting timers 284 210 / 284 250 for DIN-rail mounting

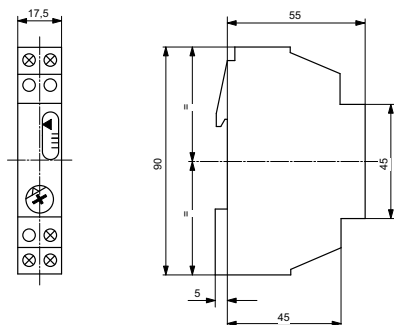

Technical data	
Voltages	230 V ±10%, 50 Hz
Switch	10 A at 250 V~, cosφ = 1
Incandescent Lamp, Halogen Lamp	2300 W
Fluorescent Lamp uncompensated	2600 W
Fluorescent Lamp series compensated	2600 W
Fluorescent Lamp parallel compensated (50 µF)	1300 W
Compact Fluorescent Lamp conventional lamp ballast	1000 W
Compact Fluorescent Lamp electronic lamp ballast	18 x 7 W, 12 x 11 W, 10 x 15 W, 10 x 20 W, 10 x 23 W max.
Quiescent current	50 mA
Advance warning function	DIN 18015-2, 2 warning signals (the light is blinking twice), 40 sec and 30 sec before switch-off
Glow lamp load	max. 100 mA
Permitted ambient temperature	-10°...+50°C

Order number	Switching contacts	Special function
paladin 284 210	1	
paladin 284 250	1	Advance warning
Housing colour		