






- Electromechanic lighting timer
- Manual override for timed or permanent lighting
- Pre-selector for 3- or 4-conductor rising mains
- Resettable after 30 sec.
- Glow lamp load: up to 50 mA
- Time delay 1 to 7 minutes

## Staircase lighting timers 254 500 for DIN-rail and wall mounting

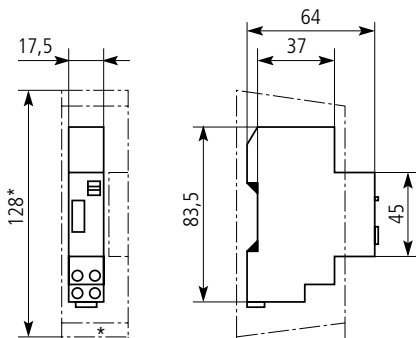

254 500



### Technical data

<b>Voltages</b>	230 V, 50–60 Hz
<b>Switch</b>	16 A at 250 V~, cosφ = 1
<b>Contact material</b>	AgSnO <sub>2</sub>
<b>Incandescent Lamp, Halogen Lamp</b>	2300 W
<b>Fluorescent Lamp uncompensated</b>	2300 W
<b>Fluorescent Lamp series compensated</b>	2300 W
<b>Fluorescent Lamp parallel compensated (70 µF)</b>	1300 W
<b>Compact Fluorescent Lamp conventional lamp ballast</b>	2000 W
<b>Compact Fluorescent Lamp electronic lamp ballast</b>	9 x 7 W, 6 x 11 W, 5 x 15 W, 5 x 20 W max.
<b>Glow lamp load</b>	max. 50 mA
<b>Permitted ambient temperature</b>	-10°...+50°C

### Accessory

Set for wall mounting	204 000
-----------------------	---------

Order number	Switching contacts
paladin 254 500	1
Housing colour	