





- Adjustable 3 to 300 lux
- Time delay approx. 1 minute before switching takes place
- While setting the Lux-value the diode lights up if Lux-value corresponds to the current light intensity.
- LED-adjustment aid, without delay
- Fitted for high lamp loads
- Double line entrance from below or through the housings rear panel

## Twilight switch 922 000 for wall mounting

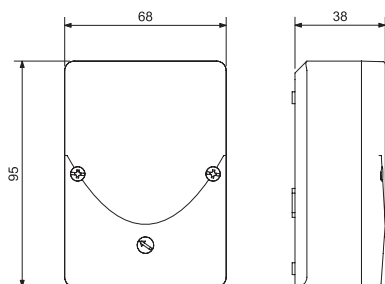

922 000



Technical data	
<b>Voltages</b>	230 V ±10%, 50 Hz
<b>Power consumption</b>	1 VA
<b>Channel</b>	Normally Open, 16 A 250 VAC
<b>Contact material</b>	AgSnO <sub>2</sub> + W pre-make contact
<b>Switching capacity</b>	16 A / 250 V~ at cosφ=1 16 A with inductive load cosφ=0.6
<b>Min. switching power</b>	1000 mW (10 V / 10 mA)
<b>Max. starting current</b>	165 A / 20 ms (filament lamp) 800 A / 200 μs (fluorescent lamp)
<b>Incandescent Lamp</b>	3000 W
<b>Fluorescent Lamp</b>	1200 VA
<b>Halogen Lamp</b>	500 W
<b>Lux range</b>	3–300 Lux
<b>Switching delay</b>	approx. 1 min
<b>Permitted ambient temperature</b>	–50°...+50°C
<b>Type of protection</b>	IP 54
<b>Dimensions</b>	95 x 68 x 38 mm
<b>Hysteresis</b>	approx. 50%

Order number	Switching contacts
paladin 922 000	1
Housing colour	